

REVO ARENA

GENERAL FEATURES

BODY	: RAL 7035 PAINTED, DKP SHEET STEEL
REFLECTOR	: HIGH PURITY BRIGHT ANODIZED ALUMINIUM(MIRO4)
DIFFUSOR	: TEMPERED TRANSPARENT GLASS COVERED WITH SAFETY FILM
BALLAST	: ELECTRONIC BALLAST
LIGHT SOCKET	: T5 LAMP - STANDARD G5 SOCKET / T8 LAMP - STANDARD G13 SOCKET
VOLTAGE	: 220-240 V AC
EMC	: LIMITED ELECTROMAGNETIC FIELD
APPLICATION METHOD	: SURFACE MOUNTED, PENDANT

OPTIONS

- EMERGENCY KIT
- T8 LAMP MODELS
- INOX BODY

THE POSSIBILITY TO ORDER READY-TO-USE REVO LUMINAIRE WITH REFLECTORS AND BULBS INSTALLED.



Ease provided by hinged lid in changing bulbs opening and closing of lids without any tools.



Tempered and high temperature resistant film covered transparent glass.

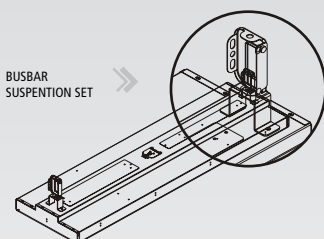


Easy cable connection without open the ballast invention lid.




Maintenance opportunity without dismantling the luminaire thanks to the ballast invention lid.


HANGING KITS




BUSBAR SUSPENSION SET

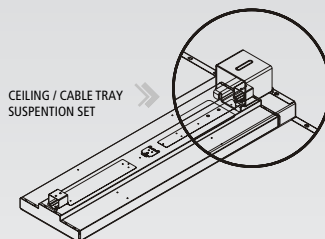

CEILING / CABLE TRAY SUSPENSION SET

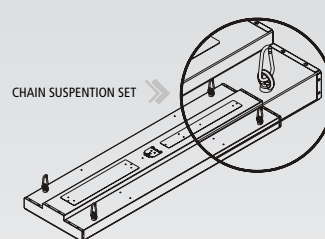

CHAIN SUSPENSION SET

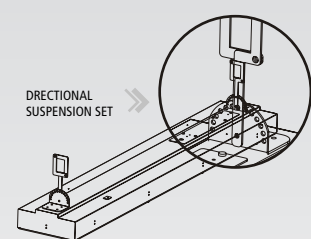

DIRECTIONAL SUSPENSION SET

The hanging accessories are ordered separately











ARENA


for high ceiling applications up to
24
 meters













LUMINAIRE CODES


MODELS WITH NO COVER IP20

Order Code	Product Code	Max. Power	Lamp Type	Dimensions (axbxh)	Weight (g)
23910	MN2 1*TL5 49U-SP/OA	1x49W	 T5	154 x 1516 x 82	3975
23911	MN2 1*TL5 54U-SP/OA	1x54W	 T5	154 x 1216 x 82	3531
23912	MN2 1*TL5 80U-SP/OA	1x80W	 T5	154 x 1516 x 82	3975
20126	MN2 2*TL5 54U-SP/OA	2x54W	 T5	192 x 1216 x 82	3948,5
20127	MN2 3*TL5 54U-SP/OA	3x54W	 T5	272 x 1216 x 82	5238,5
20128	MN2 4*TL5 54U-SP/OA	4x54W	 T5	353 x 1216 x 82	6105,7
20129	MN2 6*TL5 54U-SP/OA	6x54W	 T5	514 x 1216 x 82	8233,7
20130	MN2 2*TL5 80U-SP/OA	2x80W	 T5	192 x 1516 x 82	4654,5
20131	MN2 3*TL5 80U-SP/OA	3x80W	 T5	272 x 1516 x 82	6172,7
20132	MN2 4*TL5 80U-SP/OA	4x80W	 T5	353 x 1516 x 82	7319,7

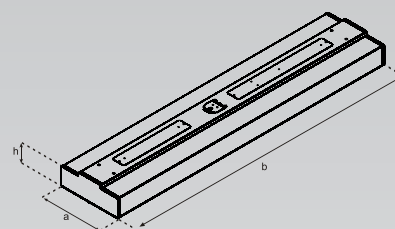

MODELS WITH TEMPERED GLASS COVER IP20

Order Code	Product Code	Max. Power	Lamp Type	Dimensions (axbxh)	Weight (g)
23916	MN2 1*TL5 49U-SP/CM	1x49W	 T5	154 x 1516 x 86	6150
23917	MN2 1*TL5 54U-SP/CM	1x54W	 T5	154 x 1216 x 86	5466
23918	MN2 1*TL5 80U-SP/CM	1x80W	 T5	154 x 1516 x 86	6150
20213	MN2 2*TL5 54U-SP/CM	2x54W	 T5	192 x 1216 x 86	6334,5
20215	MN2 3*TL5 54U-SP/CM	3x54W	 T5	272 x 1216 x 86	8585,2
20216	MN2 4*TL5 54U-SP/CM	4x54W	 T5	353 x 1216 x 86	10494,7
20277	MN2 6*TL5 54U-SP/CM	6x54W	 T5	514 x 1216 x 86	14577,7
20237	MN2 2*TL5 80U-SP/CM	2x80W	 T5	192 x 1516 x 86	7593,5
20222	MN2 3*TL5 80U-SP/CM	3x80W	 T5	272 x 1516 x 86	10349,8
20209	MN2 4*TL5 80U-SP/CM	4x80W	 T5	353 x 1516 x 86	12734,2

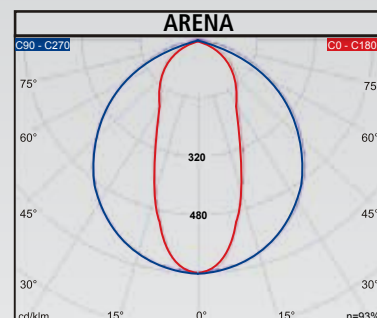

REVO ARENA

INOX BODY REVO

GENERAL FEATURES

BODY	: AIS304 STAINLESS STEEL
REFLECTOR	: HIGH PURITY BRIGHT ANODIZED ALUMINIUM(MIRO4)
DIFFUSOR	: TEMPERED TRANSPARENT GLASS COVERED WITH SAFETY FILM
BALLAST	: ELECTRONIC BALLAST
LIGHT SOCKET	: T5 LAMP - STANDARD G5 SOCKET
VOLTAGE	: 220-240 V AC
EMC	: LIMITED ELECTROMAGNETIC FIELD
APPLICATION METHOD	: SURFACE MOUNTED, PENDANT











OPTIONS

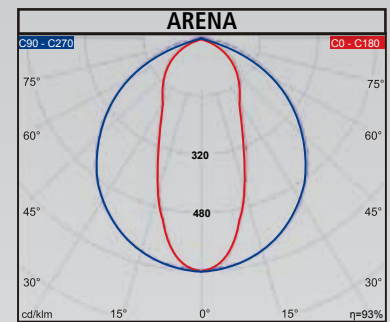
- EMERGENCY KIT
- ALUMINIUM FRAME
- IP 65 CONNECTOR










LUMINAIRE CODES


NARROW BEAM (ARENA) MODELS IP65

Product Code	Max. Power	Lamp Type	Dimensions (axbxh)
MN2 1*TL5 49U-SP/CM PSL	1x49W	 T5	154 x 1516 x 86
MN2 1*TL5 54U-SP/CM PSL	1x54W	 T5	154 x 1216 x 86
MN2 1*TL5 80U-SP/CM PSL	1x80W	 T5	154 x 1516 x 86
MN2 2*TL5 54U-SP/CM PSL	2x54W	 T5	192 x 1216 x 86
MN2 3*TL5 54U-SP/CM PSL	3x54W	 T5	272 x 1216 x 86
MN2 4*TL5 54U-SP/CM PSL	4x54W	 T5	353 x 1216 x 86
MN2 6*TL5 54U-SP/CM PSL	6x54W	 T5	514 x 1216 x 86
MN2 2*TL5 80U-SP/CM PSL	2x80W	 T5	192 x 1516 x 86
MN2 3*TL5 80U-SP/CM PSL	3x80W	 T5	272 x 1516 x 86
MN2 4*TL5 80U-SP/CM PSL	4x80W	 T5	353 x 1516 x 86



WIDE BEAM (LB) MODELS IP65

Product Code	Max. Power	Lamp Type	Dimensions (axbxh)
MN2 1*TL5 49U-SP/CM LB PSL	1x49W	 T5	154 x 1521 x 60,5
MN2 1*TL5 54U-SP/CM LB PSL	1x54W	 T5	154 x 1221 x 60,5
MN2 1*TL5 80U-SP/CM LB PSL	1x80W	 T5	154 x 1521 x 60,5
MN2 2*TL5 54U-SP/CM LB PSL	2x54W	 T5	192 x 1221 x 60,5
MN2 3*TL5 54U-SP/CM LB PSL	3x54W	 T5	272 x 1221 x 60,5
MN2 2*TL5 80U-SP/CM LB PSL	2x80W	 T5	192 x 1514 x 60,5
MN2 3*TL5 80U-SP/CM LB PSL	3x80W	 T5	280 x 1521 x 60,5

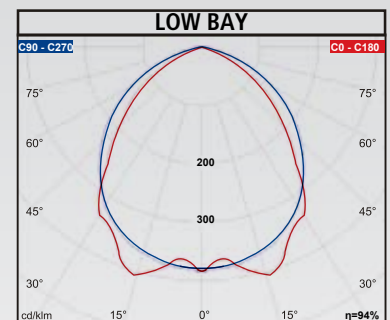

ALUMINIUM FRAMED REVO

GENERAL FEATURES

BODY	:RAL7035 PAINTED, DKP SHEET STEEL
REFLECTOR	: HIGH PURITY BRIGHT ANODIZED ALUMINIUM(MIRO4)
DIFFUSOR	: TEMPERED TRANSPARENT GLASS COVERED WITH SAFETY FILM
BALLAST	: ELECTRONIC BALLAST
LIGHT SOCKET	: T5 LAMP - STANDARD G5 SOCKET
VOLTAGE	: 220-240 V AC
EMC	: LIMITED ELECTROMAGNETIC FIELD
APPLICATION	: SURFACE MOUNTED, PENDANT

OPTIONS


- EMERGENCY KIT
- IP 65 CONNECTOR



LUMINAIRE CODES

NARROW BEAM (ARENA) MODELS IP65

Product Code	Max. Power	Lamp Type	Dimensions (axbxh)
MN2 1*TL5 49U-SP/CM ALMC	1x49W	T5	154 x 1516 x 86
MN2 1*TL5 54U-SP/CM ALMC	1x54W	T5	154 x 1216 x 86
MN2 1*TL5 80U-SP/CM ALMC	1x80W	T5	154 x 1516 x 86
MN2 2*TL5 54U-SP/CM ALMC	2x54W	T5	192 x 1216 x 86
MN2 3*TL5 54U-SP/CM ALMC	3x54W	T5	272 x 1216 x 86
MN2 4*TL5 54U-SP/CM ALMC	4x54W	T5	353 x 1216 x 86
MN2 6*TL5 54U-SP/CM ALMC	6x54W	T5	514 x 1216 x 86
MN2 2*TL5 80U-SP/CM ALMC	2x80W	T5	192 x 1516 x 86
MN2 3*TL5 80U-SP/CM ALMC	3x80W	T5	272 x 1516 x 86
MN2 4*TL5 80U-SP/CM ALMC	4x80W	T5	353 x 1516 x 86

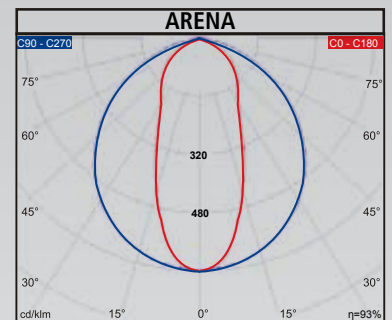

WIDE BEAM (LB) MODELS IP65

Product Code	Max. Power	Lamp Type	Dimensions (axbxh)
MN2 1*TL5 49U-SP/CM LB ALMC	1x49W	T5	154 x 1521 x 60,5
MN2 1*TL5 54U-SP/CM LB ALMC	1x54W	T5	154 x 1221 x 60,5
MN2 1*TL5 80U-SP/CM LB ALMC	1x80W	T5	154 x 1521 x 60,5
MN2 2*TL5 54U-SP/CM LB ALMC	2x54W	T5	192 x 1221 x 60,5
MN2 3*TL5 54U-SP/CM LB ALMC	3x54W	T5	272 x 1221 x 60,5
MN2 2*TL5 80U-SP/CM LB ALMC	2x80W	T5	192 x 1514 x 60,5
MN2 3*TL5 80U-SP/CM LB ALMC	3x80W	T5	280 x 1521 x 60,5

